

1 **This unedited manuscript has been accepted for future publication. The**
2 **manuscript will undergo copyediting, typesetting, and galley review before**
3 **final publication. Please note that this advanced version may differ from the**
4 **final version.**



5
6 **ORIGINAL RESEARCH ARTICLE**

7
8 **Development of an electronic device for automatic and**
9 **individualized monitoring of enteric methane emissions in dairy**
10 **COWS**

11
12 *Desarrollo de un dispositivo electrónico para el monitoreo automático e individualizado de*
13 *las emisiones de metano entérico en vacas lecheras*

14
15 *Desenvolvimento de um dispositivo eletrônico para o monitoramento automático e*
16 *individualizado das emissões de metano entérico em vacas leiteiras*

17
18 John-Fredy Ramirez-Agudelo^{1*}; Sebastian Bedoya-Mazo¹; Luisa-Fernanda Moreno-Pulgarín¹; Jose-
19 Fernando Guarín¹

20
21 ¹Universidad de Antioquia – UdeA, Facultad de Ciencias Agrarias, Grupo de Investigación en Ciencias
22 Agrarias – GRICA, Calle 70 No. 52 – 21, Apartado aéreo 1226, Medellín, Colombia.

23

Received: October 3, 2024. Accepted: January 22, 2025

**Corresponding author: Calle 70 No. 52 – 21, Medellín, Colombia. Email: johnf.ramirez@udea.edu.co*



This work is licensed under a [Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International License](https://creativecommons.org/licenses/by-nc-sa/4.0/), which permits unrestricted reuse, distribution, and reproduction in any medium, provided the original work is properly cited.

© 2025 Universidad de Antioquia. Published by Universidad de Antioquia, Colombia.

eISSN: 2256-2958

Rev Colomb Cienc Pecu
<https://doi.org/10.17533/udea.rccp.e358533>

24 *To cite this article:*

25 Ramirez-Agudelo J, Bedoya-Mazo S, Moreno-Pulgarín L, Guarín J. Development of an electronic device for
26 automatic and individualized monitoring of enteric methane emissions in dairy cows. Rev Colomb Cienc Pecu
27 Year, Vol, number, and pages pending. DOI: <https://doi.org/10.17533/udea.rccp.e358533>

28

29 **Abstract**

30

31 **Background:** Monitoring enteric methane (CH₄) emissions is crucial for identifying animals
32 with lower emissions in selection programs and to measure the effectiveness of emission
33 reduction strategies. Current methods are often expensive and complex, limiting their
34 widespread application. **Objective:** This study aimed to develop and test a low-cost, automated
35 system for individualized monitoring of CH₄ emissions in dairy cows. **Methods:** The system
36 device based on the MQ-4 gas sensor complemented by a 2 L/min airflow system, and an animal
37 identification module utilizing artificial intelligence. The CH₄ data were wirelessly transmitted
38 via an ESP8266 module to a laptop for storage. CH₄ concentrations were recorded three times
39 per second, and precise timestamps were used to document cow entry and exit from the milking
40 stall. For the animal identification module, video frames of 26 cows during milking were
41 extracted and organized into individual folders for each cow. Four versions (s, n, m, and l) of
42 the Yolov8 and Yolov10 models were fine-tuned and evaluated using a dataset divided into
43 training, validation, and testing sets. Performance metrics included Precision, Recall, F1-Score,
44 and Accuracy. The CH₄ concentration system was tested with 10 Holstein cows during their
45 milking sessions. **Results:** The prototypes successfully measured and recorded CH₄ emissions
46 from individual cows. Continuous recording allowed for detailed time-series graphs, showing
47 fluctuations in emissions. Some cows exhibited the highest average CH₄ emission level,
48 demonstrating the device's ability to identify high-emitting individuals. Baseline CH₄
49 concentrations in the feeder area were stable across cows, ensuring accurate emission
50 measurements. The identification module's comparative analysis highlighted the Yolov8n
51 model as the optimal choice due to its balance between low latency (24 ms) and high
52 performance, achieving perfect scores in precision, recall, F1-score, and accuracy.
53 **Conclusions:** The developed system effectively monitors CH₄ emissions in dairy cows,
54 offering a practical and economical alternative to traditional methods. The use of low-cost
55 sensors and advanced artificial intelligence enhances its potential for genetic improvement
56 programs and sustainable livestock management practices.

57 **Keywords:** *artificial intelligence; automatic monitoring; CH₄ emissions; computer vision; dairy*
58 *cows; enteric methane; livestock management; MQ-4 gas sensor; YOLO model.*

59

60 **Resumen**

61

62 **Antecedentes:** El monitoreo de las emisiones de metano entérico (CH₄) es crucial para
63 identificar animales con menores emisiones en programas de selección y para medir la
64 efectividad de las estrategias de reducción de emisiones. Los métodos actuales suelen ser
65 costosos y complejos, lo que limita su aplicación generalizada. **Objetivo:** Este estudio tuvo
66 como objetivo desarrollar y probar un sistema automatizado y de bajo costo para el monitoreo
67 individualizado de las emisiones de CH₄ en vacas lecheras. **Métodos:** El sistema comprende un
68 dispositivo de medición de la concentración de CH₄ basado en el sensor de gas MQ-4,
69 complementado con un sistema de flujo de aire de 2 L/min, y un módulo de identificación de
70 animales que utiliza inteligencia artificial. Los datos de CH₄ se transmitieron de forma
71 inalámbrica a través de un módulo ESP8266 a una laptop para su almacenamiento. Las
72 concentraciones de CH₄ se registraron tres veces por segundo, y se utilizaron marcas de tiempo
73 precisas para documentar la entrada y salida de las vacas del puesto de ordeño. Para el módulo
74 de identificación de animales, se extrajeron fotogramas de video de 26 vacas durante el ordeño
75 y se organizaron en carpetas individuales para cada vaca. Se ajustaron y evaluaron cuatro
76 versiones (s, n, m y l) de los modelos Yolov8 y Yolov10 utilizando un conjunto de datos
77 dividido en conjuntos de entrenamiento, validación y prueba. Las métricas de rendimiento
78 incluyeron Precisión, Recall, F1-Score y Exactitud. El sistema de medición de la concentración
79 de CH₄ se probó con 10 vacas Holstein durante sus sesiones de ordeño. **Resultados:** Los
80 prototipos midieron y registraron con éxito las emisiones de CH₄ de vacas individuales. El
81 registro continuo permitió la creación de gráficos de series temporales detallados, mostrando
82 fluctuaciones en las emisiones. Algunas vacas presentaron los niveles más altos de emisión
83 promedio de CH₄, demostrando la capacidad del dispositivo para identificar individuos con
84 altas emisiones. Las concentraciones base de CH₄ en el área de alimentación fueron estables
85 entre las vacas, lo que aseguró mediciones precisas de las emisiones. El análisis comparativo
86 del módulo de identificación destacó el modelo Yolov8n como la opción óptima debido a su
87 equilibrio entre baja latencia (24 ms) y alto rendimiento, logrando puntuaciones perfectas en
88 precisión, recall, F1-Score y exactitud. **Conclusiones:** El sistema desarrollado monitorea
89 eficazmente las emisiones de CH₄ en vacas lecheras, ofreciendo una alternativa práctica y

90 económica a los métodos tradicionales. El uso de sensores de bajo costo y la inteligencia
91 artificial avanzada mejora su potencial para programas de mejora genética y prácticas
92 sostenibles de manejo ganadero.

93

94 **Palabras clave:** *emisiones de CH₄; inteligencia artificial; manejo ganadero; metano entérico;*
95 *modelo YOLO; monitoreo automático; sensor de gas MQ-4; vacas lecheras; visión por*
96 *computadora.*

97

98 **Resumo**

99

100 **Antecedentes:** O monitoramento das emissões de metano entérico (CH₄) é crucial para
101 identificar animais com menores emissões em programas de seleção e para medir a eficácia das
102 estratégias de redução de emissões. Os métodos atuais costumam ser caros e complexos,
103 limitando sua aplicação em larga escala. **Objetivo:** Este estudo teve como objetivo desenvolver
104 e testar um sistema automatizado e de baixo custo para o monitoramento individualizado das
105 emissões de CH₄ em vacas leiteiras. **Métodos:** O sistema é composto por um dispositivo de
106 medição da concentração de CH₄ baseado no sensor de gás MQ-4, complementado por um
107 sistema de fluxo de ar de 2 L/min, e um módulo de identificação de animais utilizando
108 inteligência artificial. Os dados de CH₄ foram transmitidos sem fio por meio de um módulo
109 ESP8266 para um laptop para armazenamento. As concentrações de CH₄ foram registradas três
110 vezes por segundo, e carimbos de tempo precisos foram usados para documentar a entrada e
111 saída das vacas no local de ordenha. Para o módulo de identificação de animais, foram extraídos
112 quadros de vídeo de 26 vacas durante a ordenha e organizados em pastas individuais para cada
113 vaca. Quatro versões (s, n, m e l) dos modelos Yolov8 e Yolov10 foram ajustadas e avaliadas
114 utilizando um conjunto de dados dividido em conjuntos de treinamento, validação e teste. As
115 métricas de desempenho incluíram Precisão, Recall, F1-Score e Acurácia. O sistema de
116 medição da concentração de CH₄ foi testado com 10 vacas Holstein durante suas sessões de
117 ordenha. **Resultados:** Os protótipos mediram e registraram com sucesso as emissões de CH₄
118 de vacas individuais. O registro contínuo permitiu a criação de gráficos de séries temporais
119 detalhados, mostrando flutuações nas emissões. Algumas vacas apresentaram o maior nível
120 médio de emissão de CH₄, demonstrando a capacidade do dispositivo de identificar indivíduos
121 com altas emissões. As concentrações de CH₄ na área de alimentação foram estáveis entre as
122 vacas, garantindo medições precisas das emissões. A análise comparativa do módulo de

123 identificação destacou o modelo Yolov8n como a escolha ideal devido ao seu equilíbrio entre
124 baixa latência (24 ms) e alto desempenho, alcançando pontuações perfeitas em precisão, recall,
125 F1-Score e acurácia. **Conclusões:** O sistema desenvolvido monitora de forma eficaz as
126 emissões de CH₄ em vacas leiteiras, oferecendo uma alternativa prática e econômica aos
127 métodos tradicionais. O uso de sensores de baixo custo e inteligência artificial avançada
128 aumenta seu potencial para programas de melhoramento genético e práticas de manejo
129 sustentável do gado.

130

131 **Palavras-chave:** *emissões de CH₄; inteligência artificial; manejo de gado; metano entérico;*
132 *modelo YOLO; monitoramento automático; sensor de gás MQ-4; vacas leiteiras; visão*
133 *computacional.*

134

135 **Introduction**

136

137 Climate change is a global concern. This change is driven by greenhouse gas (GHG) emissions
138 from human activities, among which methane (CH₄) plays a significant role because it has a
139 global warming potential that is 28.5 times greater than that of carbon dioxide (CO₂) over a
140 100-year period (Bäck et al., 2024). Enteric CH₄ emissions significantly contribute to
141 agricultural GHG emissions. Ruminants contribute approximately 16% of CH₄ emissions via
142 enteric fermentation and an additional 5% from animal waste (Devine and Devine, 2024).
143 Therefore, the precise quantification of these emissions is necessary for identifying low-
144 emission animals in genetic selection programs and for evaluating the effectiveness of various
145 mitigation strategies.

146

147 Current methods for measuring enteric CH₄ emissions, such as open-circuit respiration
148 chambers (Pinares and Waghorn, 2014), the GreenFeed system (Zimmerman and Zimmerman,
149 2012), the SF₆ method (Johnson et al., 2007), and laser methane detector (Chagunda et al.,
150 2009) are effective but costly and complex, limiting their widespread application in livestock
151 production (Tedeschi et al., 2022). As an alternative, the CH₄ to CO₂ ratio in the breath samples
152 of cows using systems like the Gasmeter DX-4000 (Gasmeter Technologies Oy, Helsinki, Finland)
153 has emerged, offering a practical option for CH₄ measurement. However, this approach still
154 faces implementation challenges, especially in developing countries. This highlights the need
155 for more accessible and practical methods for monitoring CH₄ emissions in livestock

156 production. Additionally, it is essential to develop identification systems that accurately assign
157 emission readings to specific individuals.

158

159 Traditional identification methods include radio frequency identification (RFID) devices
160 (Kampers et al., 1999). While RFID devices are widely used and effective for individual animal
161 identification, they represent a significant investment due to the requirement of installing a
162 passive tag for each animal. This cost is further increased when considering the infrastructure
163 needed, such as readers and data management systems, particularly in large-scale operations.
164 Recent advancements in Precision Livestock Farming have highlighted the potential of
165 integrating RFID with other technologies, such as computer vision (CV). CV is a field of
166 artificial intelligence that enables computers and systems to interpret the visual content of the
167 world around them (de Oliveira et al., 2024). Using advanced algorithms and image processing
168 techniques, computer vision can quickly and accurately identify and classify objects in images
169 or videos (Wang et al., 2023). CV can serve as a complementary or alternative method, allowing
170 the identification of multiple animals simultaneously without the need for individual devices.
171 This approach reduces costs and is less invasive, making it particularly attractive for large herds
172 (Li et al., 2021).

173

174 The objective of this work was to develop and test a low-cost system for the individualized
175 monitoring of CH₄ emissions in dairy cows, using artificial intelligence for animal identification
176 and accessible sensors for measuring CH₄ concentrations in breath samples. This system aims
177 to provide a practical and economical alternative to traditional methods, thus facilitating its use
178 in genetic selection programs and emission mitigation strategies in livestock production.

179

180 **Materials and Methods**

181

182 The work received ethical approval from the Technical Committee for Animal Experimentation
183 at the Universidad de Antioquia. This approval is formally documented in Act No. 151, dated
184 April 11, 2023.

185

186 Figure 1 illustrates the integration of a wireless CH₄ measurement device with a computer
187 vision-based cow identification system. The CH₄ sensor transmits data wirelessly via the
188 ESP8266 module to a central laptop for storage and analysis. Simultaneously, the camera

189 captures video, which is processed by a computer vision system to identify individual cows. By
190 linking CH₄ measurements with the identification system, the device ensures the accurate
191 assignment of emissions to specific cows, supporting individualized monitoring and analysis.
192 It is important to emphasize that this paper focuses on describing the design and integration of
193 our device's components rather than conducting an exhaustive calibration or evaluation of its
194 operational accuracy. Future studies will aim to refine the calibration processes and thoroughly
195 assess the device's performance in various field conditions to validate its effectiveness and
196 reliability in real-world applications.



197
198 **Figure 1.** A schematic representation of the integrated methane measurement and identification
199 system deployed in a milking stall: A) Air pump, B) Protection box housing electronics, C) Air
200 sampler, D) Camera for cow identification, and E) A central laptop to receive information via
201 Wi-Fi from the device.

202
203 *CH₄ emissions detection module*

204

205 A low-cost system was developed for detecting changes in the concentration of CH₄ in the air
206 exhaled by cows during milking, based on the integration of various electronic and mechanical
207 components (Figure 2), detailed as follows:

208 1. MQ-4 Gas Sensor: Its sensitivity and specificity allow for measuring CH₄
209 concentrations within the range required for this type of samples (200 to 10000 ppm, Fakra et
210 al., 2020). We utilized the MQ-4 sensor manufactured by Winsen Electronics Technology Co.,
211 Ltd.

212 2. Air pump: This was used to generate a constant flow of 2 L/min, ensuring that air from
213 the feed trough, where cows eat concentrate during milking, is consistently directed toward the
214 gas sensor inside the device box.

215 3. Plastic tubing: It channels the air from the collection point (feed trough) to the gas
216 sensor, minimizing CH₄ loss and helping to ensure a representative sample of the exhaled air.

217 4. ESP8266 module: This module is responsible for collecting and transmitting the data
218 generated by the gas sensor. It uses a Wi-Fi connection to send the data to a laptop for further
219 analysis. The ESP8266 module employed in our study is produced by Espressif Systems. This
220 module integrates a 32-bit Tensilica processor and offers Wi-Fi connectivity, making it suitable
221 for IoT applications.

222 5. Protection box: All electronic and mechanical components were placed inside a
223 protection box to ensure their optimal functioning and protect against physical and
224 environmental damage.

225 6. Power source (5V): Provides the necessary voltage to power the MQ-4 Gas Sensor,
226 ESP8266 module, and air pump.

227 7. Laptop: Used for data storage.

228



229

230 **Figure 2.** Components of the methane emissions recording device. ESP8266 module (A), MQ-
231 4 gas sensor (B), air pump (C), and plastic box containing the electronic and mechanical
232 components (D). The arrows indicate the direction of the air sample flow.

233

234 For the mechanical operation of the system, the air pump generates a constant airflow of 2
235 L/min, which is directed through a plastic tube from the feed trough to the MQ-4 gas sensor.
236 This continuous flow allows uninterrupted measurement of CH₄ concentrations in the air
237 exhaled by the cows during milking. For the electronic operation, the CH₄ concentration data
238 detected by the MQ-4 sensor are processed by the ESP8266 module, which wirelessly transmits
239 them (via WiFi) to a laptop for storage and further analysis.

240

241 The Arduino code for data transmission (Appendix 1) allows the ESP8266 to connect to a Wi-
242 Fi network and send the sensor readings. Initially, the device is configured to operate in station
243 mode (Wi-Fi client) and connects to the specified network. Once the connection is established,
244 the code enters a continuous loop where the sensor values are read and sent to the local server
245 via an HTTP POST request. This mechanism ensures the continuous and real-time transmission
246 of CH₄ data detected during the use of the device. In the laptop, the Python code for receiving
247 and storing the data sent by the ESP8266 (Appendix 2) is based on the Flask framework
248 (<https://flask.palletsprojects.com/>). The Flask server is configured to accept GET and POST
249 requests at the "/data" route. When a POST request is received, the server extracts the device
250 ID and sensor readings, records the date and time, and saves this data in a text file on the laptop.

251

252 To test the CH₄ emissions recording device, the emissions of 10 dairy cows were monitored
253 with two prototypes, anticipating the possible malfunction of one of the devices, during milking
254 (5:00h and 14:00h) at the dairy unit of La Montaña farm, Universidad de Antioquia, located in
255 the municipality of San Pedro de Los Milagros, Colombia, at an altitude of 2350 meters above
256 sea level, with an average temperature of 15 °C, and relative humidity of 83%. Variations in
257 CH₄ concentration were recorded three times per second in a text file for each prototype during
258 milking. An observer noted the exact time of entry and exit of each cow from the milking stall,
259 and this information was used to organize the detections by cow and milking session.

260

261 During the trials, cows entered the milking stall and feeding area at their usual milking times,
262 as part of their daily routine. Each cow remained at the feeder for several minutes, depending

263 on milk production, which determined the overall milking duration. This allowed the device to
264 record CH₄ emissions continuously during their stay. Between consecutive cows, there was a
265 natural pause in visits to the milking stall. During this interval, the continuous airflow
266 maintained by the air pump helped to remove any residual CH₄ from the sampling system,
267 ensuring that emissions from a previous cow did not persist in the measurement area. Although
268 some residual methane could potentially influence the baseline concentration, this aspect was
269 not the focus of the current study. As mentioned, the primary purpose at this stage was to
270 demonstrate the device's design and integration, rather than to provide fully corrected emission
271 data.

272
273 In the current design phase, the baseline CH₄ concentration in the feeder area was treated as a
274 conceptual reference point rather than a rigorously established measurement. The system's
275 approach assumes that, under normal operating conditions, the feeder area maintains a relatively
276 stable ambient CH₄ concentration that can serve as a starting level. While factors such as
277 ventilation, proximity of other animals, and external emissions could influence this baseline,
278 no separate measurements were taken during cow-absent periods to quantify these variations.
279 Similarly, the airflow provided by the pump was assumed to be consistent with the
280 manufacturer's nominal specifications (approximately 2 L/min) rather than independently
281 measured or rigorously verified. At this stage, our priority was to integrate CH₄ detection,
282 wireless data transmission, and computer vision-based identification into a single device, rather
283 than ensuring fully characterized baseline conditions or meticulously controlled airflow.
284 Consequently, we cannot confirm that the chosen airflow rate is adequate to reliably capture
285 subtle variations in CH₄ concentrations between individual animals. Future research will
286 explore strategies to refine all of these assumptions, including dedicated baseline
287 measurements, improved flow-rate verification, and calibration steps.

288

289 *Identification module*

290

291 For the animals identification module, a computer vision system based on YOLO (You Only
292 Look Once, Redmon et al., 2016) object detection model was used. The process began with
293 capturing videos of 26 cows entering the milking stall. Due to the camera's position (above the
294 feed trough), the videos contained exclusively images of a single cow, which facilitated the
295 labeling process. Each video was labeled with the corresponding cow's name and stored on a

296 laptop. From these videos, frames were extracted at a rate of three frames per second. These
297 frames were saved in individual folders, each corresponding to a specific cow. This
298 organization allowed for efficient management and easy access to each animal's data. The next
299 step involved processing these frames using the Yolov8m model, pre-trained by Ultralytics
300 (<https://www.ultralytics.com/>). This model is capable of detecting cows, horses, and other
301 animals, facilitating the precise identification of cows in the frames.

302

303 The Yolov8m model was used to analyze each frame and provided the coordinates of the area
304 where the cow was found. The information obtained from the YOLO analysis was saved in text
305 files using the YOLO format. This format is widely used in computer vision applications and
306 is characterized by its simplicity and efficiency. Each line in a YOLO annotation file represents
307 an object detected in the image and follows the structure: 'class_id center_x center_y width
308 height,' where 'class_id' is the identifier of the detected object's class (in this case, cow),
309 'center_x' and 'center_y' are the coordinates of the center of the bounding box around the object,
310 normalized between 0 and 1, while 'width' and 'height' are the width and height of the bounding
311 box, also normalized between 0 and 1. These annotations allow the location and size of each
312 cow to be represented in the frames. The cows' names were alphabetically ordered and
313 converted into numbers (between 0 and 25) to assign labels ('class_id') in the text files.

314

315 The fine-tuning process of the YOLO models began with the organization and division of the
316 data (500 images) into three sets: 70% for training, 10% for validation, and 20% for testing.
317 When fine-tuning a YOLO model, the training set of images is used by the model to learn object
318 features and patterns. The model updates its parameters based on these images and their
319 annotations. The validation set is used during training to monitor performance and prevent
320 overfitting. The model does not learn from these images; instead, it uses them to fine-tune
321 hyperparameters and decide when to stop training. While the testing set is reserved for the final
322 evaluation. These images are never seen during training or validation, ensuring an unbiased
323 measure of the model's real-world performance.

324

325 In this study, the YOLO-based identification was tested using video frames containing only one
326 cow at a time. This was due to the camera's placement directly above the feed trough, which
327 naturally restricted the field of view to a single animal per image. However, YOLO is
328 fundamentally designed for multi-object detection and, in principle, can identify several cows

329 simultaneously. In real-world scenarios where multiple cows appear in the same frame, the
330 visiting cow can be determined by selecting the largest detected bounding box, representing the
331 animal closest to the camera and presumably the one currently at the milking stall.

332

333 The n, s, m, and l versions of the Yolov8 and Yolov10 models, pre-trained by Ultralytics and
334 THU-MIG (<https://github.com/THU-MIG>), respectively, were selected to perform the fine
335 tuning with the images of the dairy cows. The training process involved the following steps:
336 The model configuration specified the number of epochs (1000), image size (640 pixels), and
337 batch size (8 images per iteration). During training, the model adjusted its parameters to
338 optimize detection accuracy, using the training and validation datasets to evaluate its
339 performance and avoid overfitting. A patience criterion was set, so if no significant
340 improvements in model accuracy were observed during 50 consecutive epochs, the training
341 would automatically stop to avoid overfitting and optimize the use of computational resources.

342

343 After completing the training process, the fine-tuned models were evaluated using the testing
344 dataset. The performance metrics included Precision, Recall, F1-Score, and Accuracy. Each of
345 these metrics offers a distinct and complementary perspective on the model's ability to make
346 accurate predictions. Precision is the proportion of true positive examples out of all examples
347 predicted as positive, focusing on the correctness of the model's positive predictions. Recall,
348 also known as sensitivity or the true positive rate, measures the proportion of actual positive
349 examples that were correctly identified by the model, emphasizing the model's ability to capture
350 all relevant positive instances. The F1-Score is the harmonic mean of Precision and Recall,
351 providing a single metric that balances the trade-off between these two aspects, especially in
352 scenarios where both are equally important. Accuracy is the proportion of all correctly classified
353 examples, both positive and negative, out of the total number of evaluated examples (Sokolova
354 and Lapalme, 2009).

355

356 **Results**

357

358 *CH₄ emissions detection module*


359

360 The developed CH₄ emissions detection module successfully generated continuous data on the
361 CH₄ concentration in the air exhaled by dairy cows during milking. The data were recorded in

362 text files, capturing CH₄ concentration values three times per second for each cow throughout
363 the milking session. By combining this data with precise timestamps of each cow's entry and
364 exit from the milking stall, it was possible to create detailed time-series graphs illustrating the
365 fluctuations in CH₄ emissions for each animal.

366

367 Figure 3 presents an illustrative example of the type of data generated by the CH₄ emissions
368 recording device. The graph displays the CH₄ concentration (in parts per million, ppm) over
369 time for three cows, identified as Cow 1, Cow 2, and Cow 3. The data reveal a clear pattern:
370 the CH₄ concentration rapidly increases from the baseline level—measured as the concentration
371 in the feeder area—once the cows begin concentrate intake in the milking station. This baseline
372 concentration represents the average CH₄ level in the feeder area when no cows are present in
373 the milking station.

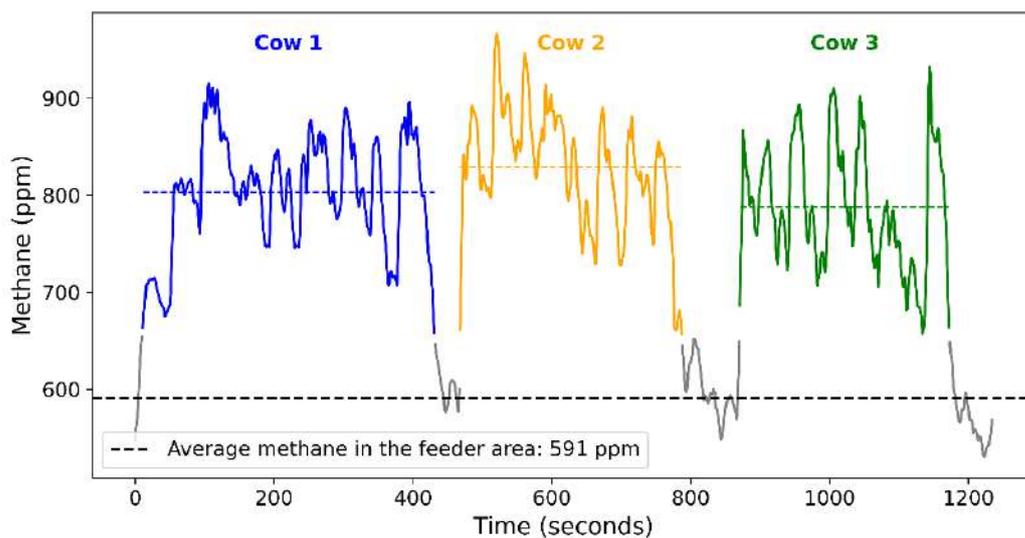

374

375 **Figure 3.** Methane concentration over time for three different cows (Cow 1, Cow 2, and Cow
376 3), identified by different colors (blue, orange, and green, respectively). The gray segments
377 represent periods when the CH₄ concentration was within the feeder area range (500-655 ppm).
378 The colored dashed lines indicate the average CH₄ concentration for each cow.

379

380 The colored dashed lines in Figure 3 indicate the average CH₄ concentration for each cow
381 during the milking session. Notably, these lines show that Cow 2 exhibited the highest average
382 CH₄ emission level compared to the other cows. This observation is important as it suggests
383 that Cow 2 may be a higher emitter of CH₄ under the conditions of this test. In addition to

384 identifying the highest emitter, the data also allow for a comparison of emission patterns
385 between the cows. For example, Cow 1 and Cow 3 demonstrated different emission profiles,
386 with variations in both the amplitude and frequency of their CH₄ concentration peaks. The CH₄
387 concentration in the feeder area, represented by the black dashed line in Figure 3, serves as a
388 crucial reference point for understanding the emission dynamics. This baseline provides a
389 consistent metric against which the increases in CH₄ concentration during active feeding can
390 be measured. However, ensuring measurement reliability and consistency involves several
391 critical steps, including comparison with validated reference methods, evaluation of systematic
392 and random errors, repeatability under identical conditions, and consistency across different
393 individuals (Bartlett and Frost, 2008). In the current study, our primary focus was on the design
394 and integration of the CH₄ measurement device. While we have successfully demonstrated the
395 device's capability to detect and record CH₄ concentrations, a comprehensive evaluation of its
396 reliability and consistency is beyond the scope of this paper.

397 The results demonstrate the effectiveness of the CH₄ emissions detection device in monitoring
398 CH₄ emissions from dairy cows during milking. The device was able to capture detailed
399 emission profiles for individual cows, highlighting differences in CH₄ output that could be
400 important for understanding and managing CH₄ emissions in dairy farming. The ability to
401 identify high-emitting cows, like Cow 2 in this example, offers valuable insights that could
402 inform targeted interventions to reduce overall CH₄ emissions in dairy herds.

403

404 *Identification module*

405

406 Table 1 provides a comparative analysis of the YOLO models, evaluating their performance
407 based on the number of training epochs required to achieve optimal results, latency, precision,
408 recall, F1-score, and accuracy. All evaluations were conducted on an x86_64 machine equipped
409 with an Intel® Xeon® CPU (2.00 GHz, 2 threads) and a single NVIDIA Tesla T4 GPU with
410 15 GB of memory. The Yolov8n model achieved maximum performance with perfect values
411 in Precision, Recall, F1-score, and Accuracy (1.00) on both the validation and testing datasets,
412 with a low latency of 24 ms. This indicates that Yolov8n offers both excellent accuracy and
413 speed. The Yolov8s, Yolov8m, and Yolov8l models also performed well but had slightly lower
414 performance metrics compared to Yolov8n. Specifically, the Yolov8s model achieved
415 Precision, Recall, F1-score, and Accuracy values ranging from 0.98 to 0.99, with the same
416 latency of 24 ms as Yolov8n. Yolov8m and Yolov8l had marginally higher latencies (36 ms

417 and 39 ms, respectively) without significant improvements in performance metrics. The
418 Yolov10 series models also demonstrated high performance. For instance, Yolov10l achieved
419 perfect scores in all metrics (1.00) on both validation and testing datasets but had a higher
420 latency of 37 ms. Other Yolov10 models showed near-perfect performance with slightly varied
421 latencies. Considering both performance and latency, the fine-tuned Yolov8n model emerges
422 as the best option. It offers perfect performance metrics with the lowest latency among the
423 models tested, making it highly suitable for the identification of individual cows within the
424 images used in this study.

425

ACCEPTED

426 **Table 1.** Performance and latency comparison of fine-tuned Yolov8 and Yolov10 models on validation and testing datasets

Model	Epochs ¹		Latency ²		Precision		Recall		F1-Score		Accuracy	
	Training	Testing	Validation	Testing	Validation	Testing	Validation	Testing	Validation	Testing	Validation	Testing
Yolov8n	116	24	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Yolov8s	35	24	0.99	0.99	0.99	0.98	0.99	0.99	0.99	0.99	0.99	0.99
Yolov8m	156	36	0.99	0.98	0.99	0.98	0.99	0.98	0.99	0.98	0.99	0.98
Yolov8l	83	39	0.99	0.99	0.99	0.99	0.99	0.99	0.99	0.99	0.99	0.99
Yolov10n	292	25	1.00	0.99	1.00	0.99	1.00	0.99	1.00	0.99	1.00	0.99
Yolov10s	120	26	0.99	1.00	1.00	0.99	1.00	0.99	1.00	1.00	1.00	1.00
Yolov10m	131	35	0.99	1.00	0.99	1.00	0.99	1.00	0.99	1.00	0.99	1.00
Yolov10l	164	37	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

427 ¹Epochs refer to the total number of training iterations completed. Training was stopped early as no improvement was observed in the last 50
 428 epochs.

429 ²Latency indicates the time (in milliseconds) taken by the fine-tuned models to process a single image from the testing dataset.

430 Figure 4 presents examples of dairy cow identification results using the Yolov8n model. All
431 images from the validation and testing sets achieved high identification performance, each with
432 a high probability score (≥ 0.98). This consistency demonstrates that the model effectively
433 identifies each individual cow without confusion or significant variability in performance
434 across different animals. It can be seen that the models successfully identified the cows with
435 high precision, highlighting the performance of Yolov8n, which not only correctly identified
436 the cows but also did so with low latency, which is crucial for real-time applications. The more
437 advanced models, such as Yolov8m and Yolov8l, despite their slightly higher latency,
438 maintained flawless detection performance, making them suitable for scenarios where latency
439 is not critical, but maximum precision is required. On the other hand, the Yolov10 series models
440 offer solid performance with acceptable latency, positioning themselves as a viable option when
441 seeking a balance between latency and accuracy.

442

443 The analysis reveals that while all the evaluated models achieved remarkable performance, the
444 choice of the optimal model will depend on the specific application requirements and the
445 characteristics of the images used. For real-time applications where latency is a critical factor,
446 Yolov8n might be preferred despite its slight sacrifice in precision. However, for applications
447 where precision is of utmost importance, Yolov8n (Figure 4) emerges as the best choice,
448 combining an ideal balance between performance and latency for the specific set of images
449 used in this study.

450



451

452 **Figure 4.** Example of dairy cow identification results using a fine-tuned YoloV8n model. This figure illustrates the detection and identification of
453 individual cows as they pass through the milking station. Each cow is enclosed within a color-coded bounding box, labeled with the cow's name
454 and the model's confidence score. These high confidence scores indicate the model's strong certainty in identifying each cow accurately.

455 Discussion

456

457 Monitoring enteric CH₄ emissions is essential for reducing the environmental impact of
458 livestock. Traditional methods like open-circuit respiration chambers, the GreenFeed system,
459 and the SF₆ tracer technique, while precise, are costly, complex, and difficult to implement on
460 a large scale (Huhtanen et al., 2015; Bekele et al., 2022). Alternative methods, such as the sniffer
461 technique (Garnsworthy et al., 2012), offer greater portability and less invasiveness but suffer
462 from inconsistencies and lower accuracy. Our developed system attempts to address these
463 challenges by providing a low-cost, practical, and scalable solution for measuring CH₄
464 emissions in dairy cows.

465

466 Low-cost, portable CH₄ quantification system using an MQ-4 sensor has been used for
467 monitoring in biogas production and environmental studies (Nagahage et al., 2021, Tovar-
468 Sánchez et al., 2023, Negara et al., 2024) and to study the daily dynamic of enteric CH₄
469 emissions in grazing ruminants (Ramirez-Agudelo et al., 2019). The system developed in this
470 study represents a significant innovation in this area, specifically applied to livestock. By
471 utilizing a MQ-4 gas sensor and integrating it with an artificial intelligence-based identification
472 module, the system offers a practical and economical alternative to traditional methods.
473 However, like the sniffer method, the developed system could potentially face similar
474 limitations related to sampling inconsistencies and environmental variations. The proximity of
475 the sensor to the animal's mouth and nose may also introduce some variability in the
476 measurements, especially if the sensor's position relative to the animal varies during data
477 collection. Nevertheless, the developed system offers several key advantages that help mitigate
478 these potential issues.

479

480 The cost-effectiveness, unlike the high costs associated with respiration chambers and the
481 GreenFeed system, the developed system uses inexpensive sensors and components, making it
482 accessible for widespread use, including in resource-limited settings. Simplicity and ease of
483 implementation, because the system is designed for easy integration into existing livestock
484 management practices, particularly during milking sessions. The use of wireless data
485 transmission and automated identification reduces the need for manual intervention and allows
486 for seamless monitoring of multiple animals simultaneously. Scalability, given that the modular
487 design of the system, combined with its low cost, makes it highly scalable. It can be easily

488 adapted to monitor larger herds or implemented in different types of livestock production
489 systems, expanding its applicability beyond dairy cows. Non-invasive monitoring, unlike the
490 SF₆ tracer technique, the developed system does not require any invasive procedures, ensuring
491 the well-being of the animals while still providing CH₄ data.

492

493 Similar to the methods mentioned above, the baseline CH₄ concentration—or background CH₄
494 concentration—is crucial for accurate emissions monitoring. In controlled environments like
495 respiration chambers, the background CH₄ levels are carefully measured and accounted for to
496 ensure that only the CH₄ directly produced by the animal is recorded. The SF₆ technique also
497 relies on establishing a clear background concentration to differentiate between the tracer gas
498 and actual CH₄ emissions. The GreenFeed system similarly uses background measurements to
499 calibrate its sensors and correct for any ambient CH₄ that might be present. In the developed
500 system, the baseline CH₄ concentration in the feeder area serves as a critical reference point,
501 providing the necessary context for interpreting the CH₄ levels emitted by the cows during
502 feeding and ensuring that the data reflects true enteric emissions rather than environmental
503 noise. The accuracy of this baseline measurement is crucial because any fluctuations or
504 inaccuracies could lead to misinterpretations of the subsequent data. For instance, if the baseline
505 is inaccurately high due to residual CH₄ from previous feeding sessions, the system might
506 underestimate the actual increase in emissions during feeding.

507

508 The behavior of the cows, including their movement during the milking session, can influence
509 the concentration of CH₄ detected by our device. Additionally, the position of the cow relative
510 to the sensor can result in variability in the measurements, as the detection of the concentration
511 of CH₄ in the exhaled breath can diminish rapidly with distance. The position of the cow relative
512 to the air sample inlet is particularly critical, as CH₄ concentration in air sample can diminish
513 rapidly with distance. To address this, the developed device incorporates an air pump system
514 that generates a constant airflow, ensuring that air from the feed trough, where the cows eat
515 during milking, is consistently directed toward the gas sensor. This setup minimizes the impact
516 of cow movement and environmental fluctuations by maintaining a steady flow of sampled air
517 to the sensor, thereby enhancing the accuracy and reliability of the measurements. However,
518 despite the advantages of the air pump system, careful positioning of the sampling inlet relative
519 to the cow's nostrils or mouth remains crucial. If the inlet is not consistently aligned, variations
520 in readings can still occur.

521

522 Despite the promising capabilities of our developed system, it is important to acknowledge
523 certain limitations of the current study. One significant limitation is the inability to directly
524 compare our CH₄ emission results with those obtained from studies using established reference
525 methods, such as open-circuit respiration chambers, the GreenFeed system, or the SF₆ tracer
526 technique. This limitation arises because our device is still in the prototype phase and has not
527 yet undergone comprehensive calibration against these standard methods. Our primary focus
528 was on the design, development, and initial testing of a low-cost CH₄ measurement device
529 integrated with an artificial intelligence-based identification system. While we successfully
530 demonstrated the device's potential for detecting CH₄ emissions and identifying individual
531 cows, the absolute CH₄ concentration values recorded may not be directly comparable to those
532 from validated methods. Without calibration and validation against these reference techniques,
533 direct comparisons could be misleading or inaccurate. Therefore, our current results serve as a
534 proof of concept rather than definitive quantitative measurements of CH₄ emissions. Future
535 research will focus on calibrating the MQ-4 sensor against established reference methods and
536 conducting controlled experiments to validate the device's accuracy.

537

538 The YOLO-based identification module demonstrated exceptional effectiveness in accurately
539 identifying individual dairy cows during the milking process. The module's performance was
540 thoroughly evaluated using various YOLO models, including the Yolov8 and Yolov10 series,
541 each fine-tuned to optimize cow identification. The performance metrics used to assess these
542 models—Precision, Recall, F1-Score, and Accuracy—indicate the module's high level of
543 reliability and precision in a practical farm setting. In real-time applications, there is often a
544 trade-off between the speed (latency) and accuracy of a model. Lower latency is crucial for
545 applications requiring immediate response, such as real-time monitoring systems. However,
546 achieving low latency can sometimes compromise the accuracy of the model. Among the
547 various YOLO models evaluated, the Yolov8n model emerged as the optimal choice for this
548 study. The Yolov8n's balance of low latency and perfect performance makes it particularly well-
549 suited for applications where both real-time processing and high accuracy are required, such as
550 monitoring and identifying cows during milking sessions.

551

552 In conclusion, this study successfully developed a low-cost, effective system for monitoring
553 enteric CH₄ emissions in dairy cows, combining the MQ-4 gas sensor with advanced artificial

554 intelligence-based identification using YOLO models. The system demonstrated its capability
555 to accurately detect and record CH₄ emissions during milking, providing detailed emission
556 profiles for individual cows. The Yolov8n model emerged as the optimal choice for cow
557 identification, offering a perfect balance between accuracy and latency, crucial for real-time
558 applications. The modular and scalable design of the system ensures its applicability across
559 various livestock environments, promoting its potential use in genetic selection programs and
560 emission mitigation strategies. Future enhancements, such as implementing rigorous calibration
561 protocols, accurately establishing baseline CH₄ concentrations, and incorporating additional
562 environmental sensors, will further improve the system's precision and reliability, reinforcing
563 its potential as a practical, cost-effective alternative to traditional CH₄ monitoring methods in
564 livestock management.

565

566 **Declarations**

567 *Acknowledgments*

568 We thank the Grupo de Investigación en Ciencias Agrarias (GRICA) at the Universidad de
569 Antioquia for their invaluable contributions and assistance throughout this research.

570

571 *Funding*

572 This study was financed by the Comité para el Desarrollo de la Investigación (CODI) at the
573 Universidad de Antioquia.

574

575 *Conflicts of interest*

576 The authors declare they have no conflicts of interest with regard to the work presented in this
577 report.

578

579 *Author contributions*

580 John-Fredy Ramirez-Agudelo: Was responsible for the design and conception of the study,
581 contributed to the technical development, and was involved in manuscript writing. Sebastian
582 Bedoya-Mazo: Administered the project, collected data, performed data analysis, provided
583 critical review and editing of the manuscript, and was involved in funding acquisition. Luisa-
584 Fernanda Moreno-Pulgarín: Contributed to data collection and technical development. Jose-
585 Fernando Guarín-Montoya: Was responsible for the study design and conception, general

586 project administration, provided critical review and editing, and contributed to funding
587 acquisition.

588

589 *Use of artificial intelligence (AI)*

590 During the preparation of this report, the authors used ChatGPT in order to enhance clarity and
591 ensure grammatical accuracy. After using this tool, the authors reviewed and edited the content
592 as needed and take full responsibility for the content of the publication.

593

594 **References**

595

596 Bäck H, May R, Naidu DS, Eikenberry S. Effect of methane mitigation on global temperature
597 under a permafrost feedback. *Glo Envi Chang Advan* 2024; 2, 100005.
598 <https://doi.org/10.1016/j.gecadv.2024.100005>

599

600 Bartlett JW, Frost C. Reliability, repeatability and reproducibility: analysis of measurement
601 errors in continuous variables. *Ultra Obstet Gynecol* 2008; 31(4).
602 <https://doi.org/10.1002/uog.5256>

603

604 Bekele W, Guinguina A, Zegeye A, Simachew A, Ramin M. Contemporary methods of
605 measuring and estimating methane emission from ruminants. *Methane* 2022; 1(2), 82-95.
606 <https://doi.org/10.3390/methane1020008>

607

608 Chagunda, MGG, Ross D, Roberts DJ. On the use of a laser methane detector in dairy
609 cows. *Comput Electron Agric* 2009; 68(2): 157-160.
610 <https://doi.org/10.1016/j.compag.2009.05.008>

611

612 Devine CE, Devine SD. The contribution of agricultural methane from ruminants and plants to
613 global warming (4588).
614 *Encyclo of Meat Sci* 2024; 3: 702-710. <https://doi.org/10.1016/B978-0-323-85125-1.00118-6>

615

616 de Oliveira FM, Silva Ferraz GA, André ALG, Santana LS, Norton T, Ferraz PFP. Digital and
617 Precision Technologies in Dairy Cattle Farming: A Bibliometric Analysis. *Anim* 2024; 14(12),
618 1832. <https://doi.org/10.3390/ani14121832>

619

620 Fakra DAH, Andriatoavina DAS, Razafindralambo NAMN, Abdallah Amarillis K,
621 Andriamampianina JMM. A simple and low-cost integrative sensor system for methane and
622 hydrogen measurement. *Sens Int* 2020; 1, 100032. [https://hal.science/hal-](https://hal.science/hal-02938019/file/Article_SI_FAKRA_2020.pdf)
623 [02938019/file/Article_SI_FAKRA_2020.pdf](https://hal.science/hal-02938019/file/Article_SI_FAKRA_2020.pdf)

624

625 Garnsworthy PC, Craigon J, Hernandez-Medrano JH, Saunders N. On-farm methane
626 measurements during milking correlate with total methane production by individual dairy
627 cows. *J Dairy Sci* 2012; 95(6), 3166-3180. <https://doi.org/10.3168/jds.2011-4605>

628

629 Huhtanen P, Cabezas-Garcia EH, Utsumi S, Zimmerman S. Comparison of methods to
630 determine methane emissions from dairy cows in farm conditions. *J Dairy Sci* 2015; 98(5),
631 3394-3409. <https://doi.org/10.3168/jds.2014-9118>

632

633 Johnson KA, Westberg HH, Michal JJ, Cossalman MW. The SF6 tracer technique: methane
634 measurement from ruminants. *Measuring methane production from ruminants Chapter 3*.
635 Springer 2007; 33-67. http://dx.doi.org/10.1007/978-1-4020-6133-2_3

636

637 Kampers FW, Rossing W, Eradus WJ. The ISO standard for radiofrequency identification of
638 animals. *Comput Electron Agric* 1999; 24(1-2), 27-43. [https://doi.org/10.1016/S0168-](https://doi.org/10.1016/S0168-1699(99)00035-6)
639 [1699\(99\)00035-6](https://doi.org/10.1016/S0168-1699(99)00035-6)

640

641 Li G, Huang Y, Chen Z, Chesser GD, Purswell JL, Linhoss J, Zhao Y. Practices and Applications
642 of Convolutional Neural Network-Based Computer Vision Systems in Animal Farming: A
643 Review. *Sensors* 2021; 21(4). <https://doi.org/10.3390/s21041492>

644

645 Nagahage ISP, Nagahage EAAD, Fujino T. Assessment of the applicability of a low-cost
646 sensor-based methane monitoring system for continuous multi-channel sampling. *Environ*
647 *Monit Assess* 2021; 193, 1-14. <https://doi.org/10.1007/s10661-021-09290-w>

648

649 Negara IGA, Anakottapary DS, Widianara IBG, Midiani LPI, Nindhia TGT, Santhiarsa I GNN.
650 Integrated microcontroller mq sensors for monitoring biogas: Advancements in methane and

651 hydrogen sulfide detection. *J Teknosains* 2024; 13(2), 140-151.
652 <https://core.ac.uk/download/609733546.pdf>
653

654 Pinares C, Waghorn G (Eds.). Technical manual on respiration chamber designs. Ministry of
655 Agriculture and Forestry 2014. [https://globalresearchalliance.org/wp-](https://globalresearchalliance.org/wp-content/uploads/2017/06/GRA-MAN-Facility-BestPract-2012-FINAL.pdf)
656 [content/uploads/2017/06/GRA-MAN-Facility-BestPract-2012-FINAL.pdf](https://globalresearchalliance.org/wp-content/uploads/2017/06/GRA-MAN-Facility-BestPract-2012-FINAL.pdf)
657

658 Ramirez-Agudelo JF, Rosero-Noguera JR, Posada-Ochoa SL. Monitoring methane emissions
659 and intake dynamics in ruminants. Proceedings of the 9th European Conference on Precision
660 Livestock Farming 2019; 109-114; Cork, Ireland. URL: [https://www.eaplf.eu/wp-](https://www.eaplf.eu/wp-content/uploads/ECPLF_19_book.pdf)
661 [content/uploads/ECPLF_19_book.pdf](https://www.eaplf.eu/wp-content/uploads/ECPLF_19_book.pdf)
662

663 Redmon J, Divvala S, Girshick R, Farhadi A. You only look once: Unified, real-time object
664 detection. *Comput Soc Conf Comput Vis Pattern Recognit* 2016; pp. 779-788.
665 <https://arxiv.org/pdf/1506.02640>
666

667 Sokolova M, Lapalme G. A systematic analysis of performance measures for classification
668 tasks. *Inf Process Manag* 2009; 45(4), 427-437. <https://doi.org/10.1016/j.ipm.2009.03.002>
669

670 Tedeschi LO, Abdalla AL, Alvarez C, Anuga SW, Arango J, Beauchemin KA, Kebreab E.
671 Quantification of methane emitted by ruminants: a review of methods. *J Anim Sci* 2022; 100(7).
672 <https://doi.org/10.1093/jas/skac197>
673

674 Tovar-Sánchez JA, Arias-Molina JF, Milquez-Sanabria HA, Mayorga-Castellanos MA. Diseño
675 técnico de un sistema de cuantificación de metano portable y de bajo costo. *Ingeniería* 2023; 28.
676 <https://doi.org/10.14483/23448393.19053>
677

678 Wang Y, Múcher S, Wang W, Guo L, Kooistra L. A review of three-dimensional computer vision
679 used in precision livestock farming for cattle growth management. *Compu Electro Agri* 2023;
680 206, 107687. <https://doi.org/10.1016/j.compag.2023.107687>
681

682 Zimmerman PR, Zimmerman RS. Method and system for monitoring and reducing ruminant
683 methane production. Patent No. 8,307,785. Washington, DC: U.S. Patent and Trademark Office
684 2012. <https://patents.justia.com/patent/8307785>

685

686 **Appendices**

687

688 **Appendix 1: Arduino code for Real-Time Data Transmission using ESP8266**

689

690 This appendix provides the Arduino code used for transmitting data from the ESP8266 module
691 to a web server. The code initializes the ESP8266 in station mode to connect to a specified WiFi
692 network, reads sensor data from an analog pin, and sends this data to a server using an HTTP
693 POST request. The server response is then displayed in the serial monitor, allowing real-time
694 monitoring of the sensor data transmission.

695

696 // Include the necessary libraries for the ESP8266 WiFi module and HTTP client functionality.

697 #include <ESP8266WiFi.h>

698 #include <ESP8266HTTPClient.h>

699

700 // Define the credentials for the WiFi network that the device will connect to.

701 // Replace the empty strings with your actual WiFi SSID and password.

702 const char* ssid = "YOUR_SSID";

703 const char* password = "YOUR_PASSWORD";

704

705 // Initialize a WiFiClient object to manage network connections.

706 WiFiClient wifiClient;

707

708 // The setup function runs once when the device is powered on or reset.

709 void setup() {

710 // Start serial communication at a baud rate of 115200 for debugging purposes.

711 Serial.begin(115200);

712

713 // Set the WiFi mode to station (client) mode.

714 WiFi.mode(WIFI_STA);

```
715
716 // Begin connecting to the specified WiFi network using the provided credentials.
717 WiFi.begin(ssid, password);
718
719 // Continuously check the WiFi connection status until connected.
720 while (WiFi.status() != WL_CONNECTED) {
721     delay(1000);        // Wait for one second before the next status check.
722     Serial.print(".");  // Print a dot to the serial console to indicate ongoing connection attempts.
723 }
724
725 // Once connected, print a confirmation message to the serial console.
726 Serial.println("\nWiFi connected");
727 Serial.print("IP Address: ");
728 Serial.println(WiFi.localIP()); // Display the assigned IP address.
729 }
730
731 // The loop function runs repeatedly after setup() has completed.
732 void loop() {
733     // Verify that the device is currently connected to the WiFi network.
734     if (WiFi.status() == WL_CONNECTED) {
735         // Create an HTTPClient object to handle HTTP requests.
736         HTTPClient http;
737
738         // Define the server URL where the data will be sent.
739         // Replace "192.XXX.XX.XXX" with the actual IP address of your Flask server.
740         http.begin(wifiClient, "http://192.XXX.XX.XXX:8080/data");
741
742         // Specify the content type of the HTTP request as form URL encoded.
743         http.addHeader("Content-Type", "application/x-www-form-urlencoded");
744
745         // Read the analog value from pin A0 where the MQ4 sensor is connected.
746         int sensorValue = analogRead(A0);
747         Serial.print("Sensor Value: ");
```

```
748 Serial.println(sensorValue); // Output the sensor value to the serial console for debugging.
749
750 // Construct the POST data string with the device ID and sensor reading.
751 // "ESP2" is used here as the device identifier; modify as needed for your setup.
752 String postData = "device_id=ESP2&sensor_reading=" + String(sensorValue);
753
754 // Send the POST request with the sensor data to the server and store the response code.
755 int httpCode = http.POST(postData);
756
757 // Print the HTTP response code to the serial console for debugging.
758 Serial.print("HTTP Response Code: ");
759 Serial.println(httpCode);
760
761 // If the request was successful (response code > 0), process the server's response.
762 if (httpCode > 0) {
763     // Retrieve the response payload from the server.
764     String payload = http.getString();
765     // Display the server's response in the serial console.
766     Serial.println("Server Response:");
767     Serial.println(payload);
768 } else {
769     // If the request failed, print an error message with the response code.
770     Serial.print("Error on sending POST: ");
771     Serial.println(http.errorToString(httpCode).c_str());
772 }
773
774 // Close the HTTP connection to free resources.
775 http.end();
776 } else {
777     // If the device is not connected to WiFi, print a warning message.
778     Serial.println("WiFi not connected");
779 }
780
```

```
781 // Wait for 250 milliseconds before sending the next sensor reading.
782 delay(250);
783 }
```

784

785 **Appendix 2:** Python code for Real-Time Data Reception and Storage using Flask

786

787 This appendix provides the Python code used for receiving and storing data sent by the
788 ESP8266 module via HTTP POST requests. The code initializes a Flask application that listens
789 for incoming data on a specified route (/data). Upon receiving the data, the server logs the
790 methane readings along with a timestamp into a text file.

791

```
792 from flask import Flask, request
793 from datetime import datetime
794
795 # Initialize the Flask application
796 app = Flask(__name__)
797
798 # Global variable to store the name of the last file where data was saved
799 last_filename = None
800
801 # Define the route '/data' that handles both GET and POST HTTP methods
802 @app.route('/data', methods=['GET', 'POST'])
803 def data():
804     global last_filename # Allow modification of the global variable within this function
805
806     if request.method == 'POST':
807         # Extract 'device_id' and 'sensor_reading' from the incoming form data
808         device_id = request.form.get('device_id')
809         sensor_reading = request.form.get('sensor_reading')
810
811         # Validate that both 'device_id' and 'sensor_reading' are provided
812         if not device_id or not sensor_reading:
```

```

813         return "Missing data in the POST request.", 400 # Return a 400 Bad Request if data is
814 incomplete
815
816         # Get the current date and time formatted as 'YYYY-MM-DD HH:MM:SS.ff'
817         current_time = datetime.now().strftime('%Y-%m-%d %H:%M:%S.%f')[:-5]
818
819         # Format the current time to 'YYYY-MM-DD_HH' for use in the filename
820         filename_time = datetime.now().strftime('%Y-%m-%d_%H')
821
822         # Prepare the content string to be written to the file
823         content = f"{device_id},{current_time},{sensor_reading}\n"
824
825         # Generate the filename using 'device_id' and the formatted current time
826         filename = f"{device_id}_{filename_time}.txt"
827         last_filename = filename # Update the global variable with the new filename
828
829         # Open the file in append mode and write the content
830         with open(filename, 'a') as file:
831             file.write(content)
832
833         # Return an HTML response confirming successful data saving, displaying the filename
834         return f"""
835 <html>
836     <body>
837         <h1>Success</h1>
838         <p>Data has been successfully saved to the file: <strong>{filename}</strong></p>
839     </body>
840 </html>
841 """, 200
842
843 elif request.method == 'GET':
844     # Handle GET requests to provide status information about data logging
845     if last_filename:

```

```
846     # If data has been previously logged, inform the user
847     return f"""
848     <html>
849         <body>
850             <h1>MQ4 Data Logging Status</h1>
851             <p>Data is currently being saved in the file:
852 <strong>{last_filename}</strong></p>
853         </body>
854     </html>
855     """, 200
856 else:
857     # If no data has been logged yet, inform the user accordingly
858     return """
859     <html>
860         <body>
861             <h1>MQ4 Data Logging Status</h1>
862             <p>No data has been logged yet.</p>
863         </body>
864     </html>
865     """, 200
866
867 # Entry point to run the Flask application
868 if __name__ == '__main__':
869     # Start the Flask development server, accessible externally on port 8080
870     app.run(host='0.0.0.0', port=8080)
```